




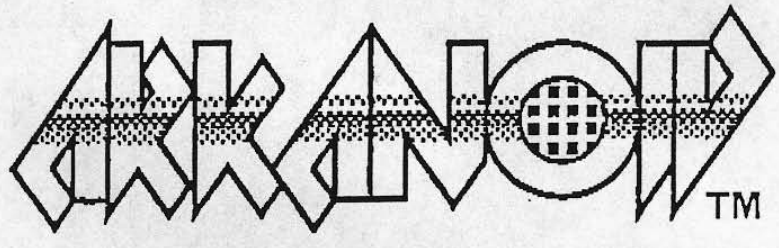


TT (200 X 115)
UP (115 X 130)



R SIZE X 1.3



PLAY INSTRUCTIONS

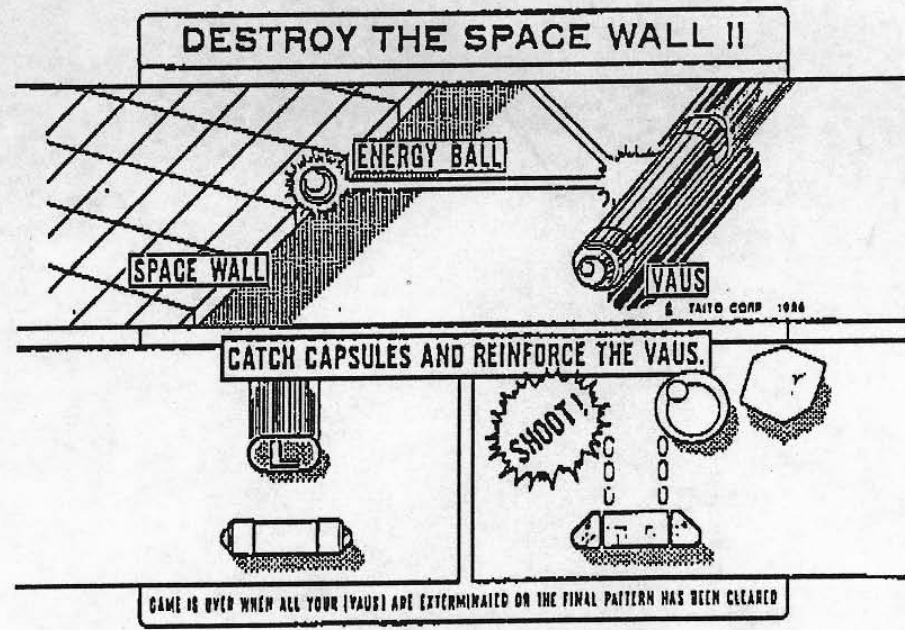


TAITO TAITO CORPORATION



1. Wiring Method for Control Panel

Make the wiring for the control panel by referring to the sketch below.


(Control Panel)

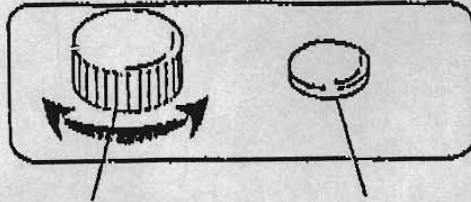

Sensor Control (2-Way) Serve/Fire Button

(Wiring Method for P-Free Harness Assy)

* The wiring to the push-button assy is not included in the P-Free Harness Assy.

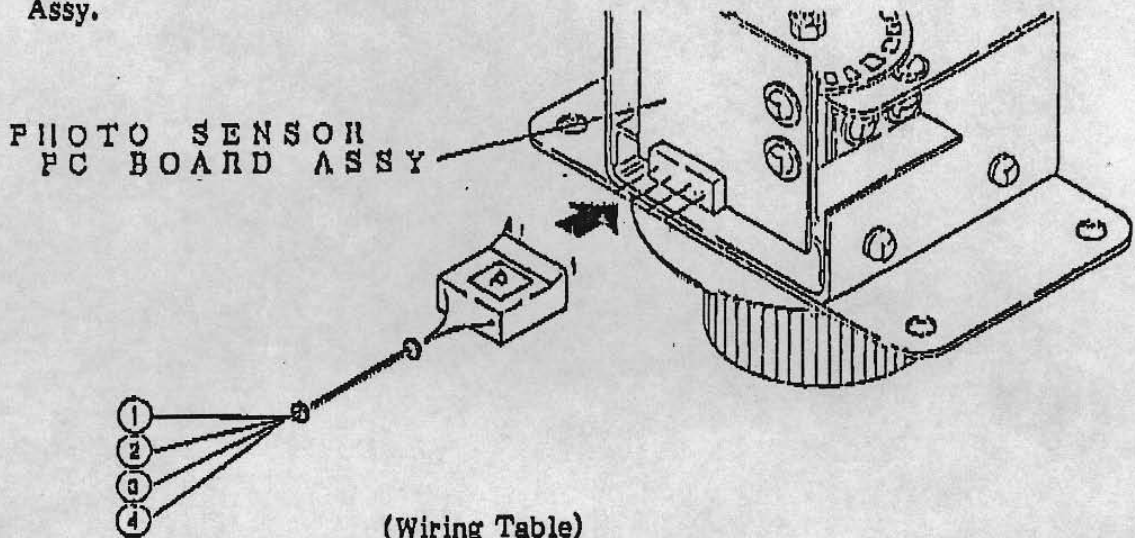


(Wiring Table)

P-Free Harness Assy No. (Colors)	Signals	Connector Terminal No.	Signals	Connector Terminal No.
1 (GREEN-BLUE)	1P LEFT	16	2P LEFT	T
2 (RED)	+5V		+5V	
3 (BLACK)	GND		GND	
4 (RED-YELLOW)	1P RIGHT	15	2P RIGHT	S
	1P SERVE/FIRE	21	2P SERVE/FIRE	Y

(Solder Side)

(No indications exist.)

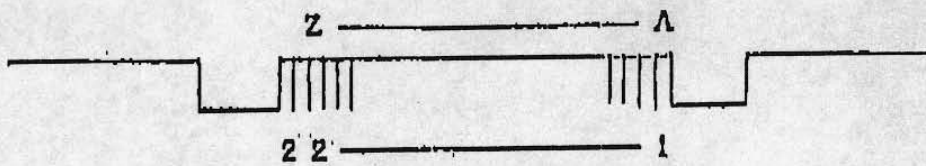

(Component Side)

