ADJUSTMENTS ON GAME PC BOARD (ARKANOID REVENGE OF DOH CAT 00125A)

ARKANOID Revenge of Doh

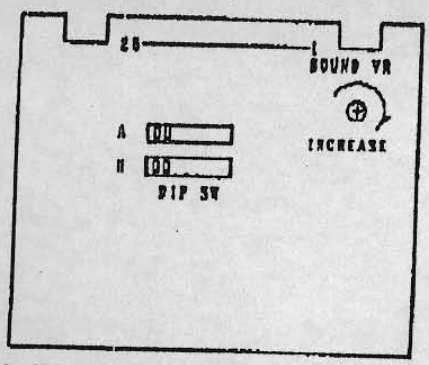

CONNECTOR

SOLDER SIDE		COMPONENTS SIDE
GND	A 1	GND
GND	B 2	GND
+5V	C 3	+5V
+5V	D 4	+5V
+12V	E 5	+12V (+13V)
COST	F 6	COST
COIN COUNTER 1	H 7	COIN COUNTER 1
COIN LOCKOUT 1	J 8	COIN LOCKOUT 1
SPEAKER (-)	K 9	SPEAKER (+)
	L 10	
VIDEO G	M 11	VIDEO B
VIDEO SYNC	N 12	VIDEO R
SERVICE SW	P 13	VIDEO GND
1P SW	R 14	
COIN 2	S 15	COIN 1
2P START	T 16	1P START
	U 17	
	V 18	
1P LEFT	W 19	1P LEFT
1P RIGHT	X 20	1P RIGHT
1P SERVE/FIRE	Y 21	1P SERVE/FIRE
	Z 22	
	a 23	
	b 24	
GND	c 25	GND
GND	d 26	GND

☆ THE CONTROL OF THIS GAME CONSISTS OF ONE CONTROL SENSOR(PHOTO-SENSOR) AND 1 BUTTON.

NOTE)
BEFORE CHANGING THE SETTINGS OF THE DIP SWITCH, TURN THE POWER SWITCH OFF.

◇ SETTING OF DIP SWITCH A

(*) : FACTORY SETTINGS

SETTING	POSITION	1	2	3	4	5	6	7	8
CAME STYLE	TABLE	OFF							
	UPRIGHT	ON							
SCREEN INVERSION	* NORMAL		OFF						
	INVERSION		ON						
TEST MODE	* NORMAL GAME			OFF					
	TEST MODE			ON					
ATTRACT SOUNDS	* PRODUCED				OFF				
	NO PRODUCED				ON				
PLAY PRICING COIN 1	* 1 COIN 1 PLAY					OFF	OFF		
	2 COIN 1 PLAYS					ON			
	3 COINS 1 PLAY					OFF	ON		
	4 COINS 1 PLAYS					ON			
PLAY PRICING COIN 2	* 1 COIN 1 PLAY							OFF	OFF
	1 COIN 2 PLAYS							ON	
	1 COINS 3 PLAY							OFF	ON
	1 COINS 4 PLAYS							ON	

◇ SETTING OF DIP SWITCH B

SETTING	POSITION	1	2	3	4	5	6	7	8
GAME DIFFICULTY EASY(A) — DIFFICULT(D)	* RANK B	OFF	OFF						
	RANK A	ON							
	RANK C	OFF	ON						
	RANK D	ON							
BONUS POINTS 1ST/2ND (EVERY)	* 100,000/200,000PTS			OFF	OFF				
	100,000PTS.ONLY			ON					
	50,000 PTS.ONLY			OFF	ON				
	50,000/150,000PTS.			ON					
NUMBER OF PLAYER	* 3					OFF	OFF	OFF	
	2					ON			
	4					OFF	ON		
	5					ON			
CONTINUED PLAY	* WITHOUT								OFF
	WITH								ON