


CONNECTOR HARNESS

FOR DIG DUG
 A is solder side.
 B is pins side.

DIP SWITCH FUNCTIONS

1 OFF	2 OFF	1 COIN 1 PLAY
1 ON	2 OFF	2 COIN 1 PLAY
1 OFF	2 ON	1 COIN 2 PLAY
1 ON	2 ON	FREE PLAY
3 OFF		3 FIGHTER'S
3 ON		4 FIGHTER'S
4 OFF		TABLE TYPE
4 ON		UP LIGHT TYPE
5 OFF	6 OFF	BONUS 10000 POINTS
5 OFF	6 ON	" 30000 "
5 ON	6 OFF	" 20000 "
5 ON	6 ON	" 40000 "

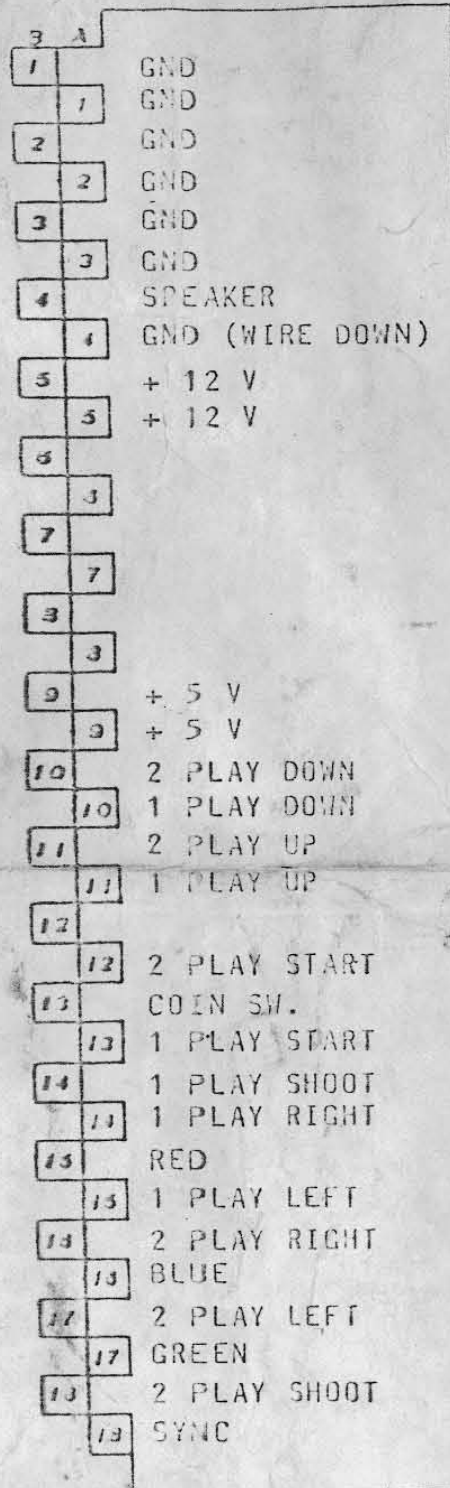

Dig-Dug

Drg Drg

WIRING OF CONNECTOR
FOR

"~~1010~~" (Single-Board Type)

Parts	Side		Soldering	Side
GND		1 18	X	GND
GND		2 14	X	GND
GND		3 16	X	GND
SPEAKER		4 15	X	GND
+12V		5 14	X	+12V
-		6 13	X	-
-		7 12	X	-
-		8 11	X	-
+5V		9 10	X	+5V
2P DOWN		10 9	X	1P DOWN
2P UP		11 8	X	1P UP
-		12 7	X	2P START
COIN SW		13 6	X	1P START
1P SHOOT		14 5	X	1P RIGHT
RED		15 4	X	1P LEFT
2P RIGHT		16 3	X	BLUE
2P LEFT		17 2	X	GREE
2P SHOOT		18 1	X	SYNC

DIP SWITCH FUNCTION TABLE

for

"LAUREL" (Single Board Type)

	SW1	SW2	SW3	SW4	SW5	SW6
1 Coin 1 play	OFF	OFF				
2 " 1 "	ON	OFF				
1 " 2 "	OFF	ON				
Free Play	ON	ON				
Bonus 10,000 pts					OFF	OFF
" 20,000 "					ON	OFF
" 30,000 "					OFF	ON
" 40,000 "					ON	ON
3 Dig-Dug			OFF			
4 Dig-Dug			ON			
For Table Type				OFF		
For Upright Type				ON		