


森林王者

接続図

EDGE CONNECTOR DIAGRAM (EDGE CONNECTOR OF JAMMA SPECS.)

--- LORD OF KING --- (ASTYANAX)

COMPONENT SIDE		SOLDER SIDE	
GND	1	A	GND
GND	2	B	GND
HEADPHONE L&R (-)		.	
+5V	3	C	+5V
+5V	4	D	+5V
	5	E	
+12V	6	F	+12V
KEY TO PREVENT ERRONEOUS INSERTION	7	H	KEY TO PREVENT ERRONEOUS INSERTION
COIN METER #1	8	J	COIN METER #2
	9	K	
SPEAKER 1 (+)	10	L	SPEAKER 1 (-)
HEADPHONE L (+)			
	11	M	
VIDEO RED	12	N	VIDEO GREEN
VIDEO BLUE	13	P	VIDEO SYNC
VIDEO GND	14	R	SERVICE SV
	15	S	
COIN SV #1	16	T	COIN SV #2
1P START	17	U	2P START
1P UP	18	V	2P UP
1P DOWN	19	W	2P DOWN
1P LEFT	20	X	2P LEFT
1P RIGHT	21	Y	2P RIGHT
1P PUSH 1	22	Z	2P PUSH 1
1P PUSH 2	23	a	2P PUSH 2
1P PUSH 3	24	b	2P PUSH 3
	25	c	
	26	d	
GND	27	e	GND
GND	28	f	GND

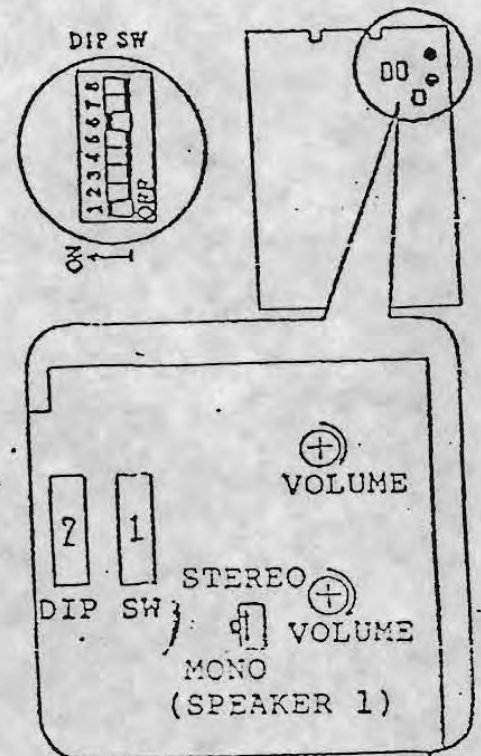

SPEAKER 2 (+)	1	2	SPEAKER 2 (-)
HEADPHONE R (+)			

ジャレコ単線圖 (ASTYANAX) --- LORD OF KING ---

DIP SWITCH #1

		1	2	3	4	5	6	7	8
FIRST COINCHUTE	1 COIN 1 CREDIT	OFF	OFF	OFF					
	1 COIN 2 CREDITS	OFF	OFF	ON					
	1 COIN 3 CREDITS	OFF	ON	OFF					
	1 COIN 4 CREDITS	OFF	ON	ON					
	1 COIN 5 CREDITS	ON	OFF	OFF					
	2 COINS 1 CREDIT	ON	OFF	ON					
	3 COINS 1 CREDIT	ON	ON	ON					
FREE PLAY		ON	ON	OFF					
SECOND COINCHUTE	1 COIN 1 CREDIT				OFF	OFF	OFF		
	1 COIN 2 CREDITS				OFF	OFF	ON		
	1 COIN 3 CREDITS				OFF	ON	OFF		
	1 COIN 4 CREDITS				OFF	ON	ON		
	1 COIN 5 CREDITS				ON	OFF	OFF		
	2 COINS 1 CREDIT				ON	OFF	ON		
	3 COINS 1 CREDIT				ON	ON	OFF		
	4 COINS 1 CREDIT				ON	ON	ON		
SOUND IN ATTRACT MODE	NECESSARY							ON	
	UNNECESSARY							OFF	
NOT USED KEEP TO "OFF"									OFF

DIP SWITCH #2

Standard Setting

		1	2	3	4	5	6	7	8
NOT USED KEEP TO "OFF"		OFF							
			OFF						
EXTRA HERO AWARDED FOR SCORES OF									
30,000, 70,000, 110,000 AND EVERY ADDITIONAL 30,000 AFTER 110,000									
50,000, 100,000 AND EVERY ADDITIONAL 40,000 AFTER 100,000				ON					
NUMBER OF PLAYER'S HEROES	2 HEROES				OFF	ON			
	3 HEROES								
	4 HEROES				ON	OFF			
	5 HEROES				ON	ON			
DIFFICULTY LEVEL	NORMAL								
	DIFFICULT						ON		
SINGLE PLAYER'S POSITION	LEFT-HAND SIDE							OFF	
	RIGHT-HAND SIDE							ON	
SCREEN DISPLAY	NORMAL								OFF
	REVERSE								ON