


LUCK 9 WIRING

P 1/4

1. Position:

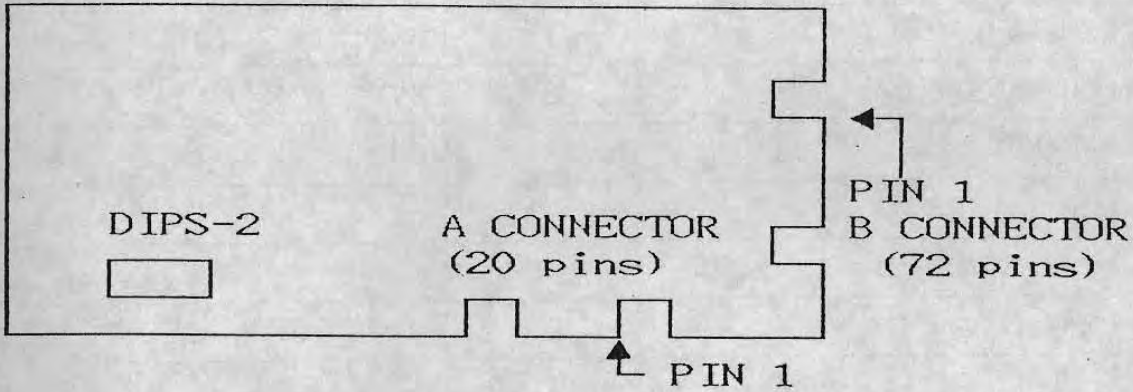

2. Wiring

A CONNECTOR (20 PINS)

COMPONENT SIDE		SOLDER SIDE	
PIN NO.	FUNCTION	PIN NO.	FUNCTION
1.	GND	1.	GND
2.	GND	2.	GND
3.	+5V	3.	+5V
4.	+5V	4.	+5V
5.	+12V	5.	+12V
6.	+12V	6.	+12V
7.	HOPPER CONTROL	7.	HOPPER CONTROL
8.		8.	
9.	GND	9.	GND
10.	GND	10.	GND

LUCKY 7 WIRING

P-4

(1) B CONNECTOR (72 pins)

COMPONENT SIDE		SOLDER SIDE	
PIN NO.	FUNCTION	PIN NO.	FUNCTION
1.	RED (VIDEO)	1.	GREEN (VIDEO)
2.	BLUE (VIDEO)	2.	SYNC (VIDEO)
3.	SPEAKER	3.	GND
4.	PLAY 1 (DB 1)	4.	
5.	PLAY 2 (DB 2)	5.	
6.	PLAY 3 (DB 3)	6.	
7.		7.	
8.	PLAY 2 (DB 2)	8.	
9.	DEAL	9.	
10.	SMALL	10.	
11.		11.	
12.	TAKE	12.	
13.	DOUBLE	13.	
14.		14.	
15.		15.	
16.	BIG	16.	
17.		17.	
18.	PLAY 3 (DB 3)	18.	COIN (COIN & NOTE ACCEPTOR)
19.	PLAY 1 (DB 1)	19.	KEY IN
20.	BOOKING (STATUS)	20.	
21.	PAY OUT	21.	KEY OUT (CLEAR CREDIT)
22.	GND	22.	HOPPER COIN SW
23.	COIN IN COUNTER	23.	
24.	KEY IN COUNTER	24.	
25.	KEY OUT COUNTER	25.	
26.	PAY OUT COUNTER	26.	

LUCKY → WIRING

(2) B CONNECTOR (72 pins)

f 3/4

COMPONENT SIDE		SOLDER SIDE	
PIN NO.	FUNCTION	PIN NO.	FUNCTION
27.	BIG LAMP	27.	
28.	DOUBLE LAMP	28.	
29.	PLAY 1 LAMP	29.	PLAY 3 LAMP
30.	PLAY 2 LAMP	30.	
31.	DEAL LAMP	31.	SMALL LAMP
32.	TAKE / HALF LAMP	32.	PAY LAMP
33.		33.	
34.		34.	
35.		35.	
36.	GND LAMP	36.	GND LAMP

DIP SWITCH SETTING

DIP-S2

f-4

FUNCTION	POSITION	1	2	3	4	5	6	7	8
MAIN GAME RATE (95%)									OFF
MAIN GAME RATE (85%)									ON
DOUBLE UP RATE (95%)								OFF	
DOUBLE UP RATE (85%)								ON	
COIN (1 COIN) 1 CREDIT						ON	ON		
COIN (1 COIN) 2 CREDIT						ON	OFF		
COIN (1 COIN) 10 CREDIT						OFF	ON		
COIN (1 COIN) 50 CREDIT						OFF	OFF		
KEY IN (1 KEY) 100 CREDIT				ON	ON				
KEY IN (1 KEY) 110 CREDIT				ON	OFF				
KEY IN (1 KEY) 120 CREDIT				OFF	ON				
KEY IN (1 KEY) 130 CREDIT				OFF	OFF				
HOPPER TYPE N.C.			ON						
HOPPER TYPE N.O.			OFF						
SPECIAL BONUS LIMIT 500		ON							
SPECIAL BONUS LIMIT 1000		OFF							