

MY HERO

COIN/CREDIT OPTION SWITCH SETTING

DIP SWITCH #A

OPTION	1	2	3	4	5	6	7	8
1 COIN 1 CREDIT	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1 COIN 2 CREDITS	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
1 COIN 3 CREDITS	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
1 COIN 4 CREDITS	ON	ON	OFF	OFF	ON	ON	OFF	OFF
1 COIN 5 CREDITS	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
1 COIN 6 CREDITS	ON	OFF	ON	OFF	ON	OFF	ON	OFF
2 COINS 1 CREDIT	OFF	ON	ON	OFF	OFF	ON	ON	OFF
3 COINS 1 CREDIT	ON	ON	ON	OFF	ON	ON	ON	OFF
4 COINS 1 CREDIT	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON
2 COINS 3 CREDITS	ON	OFF	OFF	ON	ON	OFF	OFF	ON
2 COINS 1 CREDIT	OFF	ON	OFF	ON	OFF	ON	OFF	ON
4 COINS 3 CREDITS	ON	ON	OFF	ON	ON	ON	OFF	ON
1 COIN 1 CREDIT	OFF	OFF	ON	ON	OFF	OFF	ON	ON
2 COINS 2 CREDITS	ON	OFF	ON	ON	ON	OFF	ON	ON
3 COINS 3 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON
4 COINS 4 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON
5 COINS 6 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON
1 COIN 1 CREDIT	ON	ON	ON	ON	ON	ON	ON	ON
2 COINS 2 CREDITS	ON	OFF	ON	ON	ON	OFF	ON	ON
3 COINS 3 CREDITS	ON	OFF	ON	ON	ON	OFF	ON	ON
4 COINS 5 CREDITS	ON	OFF	ON	ON	ON	OFF	ON	ON
1 COIN 1 CREDIT	OFF	ON	ON	ON	OFF	ON	ON	ON
2 COINS 3 CREDITS	OFF	ON	ON	ON	OFF	ON	ON	ON
1 COIN 1 CREDIT	ON	ON	ON	ON	ON	ON	ON	ON

COIN SWITCH # 1

COIN SWITCH # 2


OPTION SWITCH SETTING

DIP SWITCH #B

OPTION	1	2	3	4	5	6	7	8
TABLE	OFF							
UPRIGHT	ON							
ADVERTISE	OFF	OFF						
SOUND	ON	ON						
3 HEX			OFF	OFF				
NUMBER OF			ON	OFF				
PLAYERS			OFF	ON				
FREE			ON	ON				
SCORE OF	30000				OFF	OFF		
ADDITIONAL	50000				ON	OFF		
PLAYER	70000				OFF	ON		
	90000				ON	ON		
GAME	EASY						OFF	
DIFFICULTY	HARD						ON	



BARE BD No.
171-6034
171-6054
171-6054-01

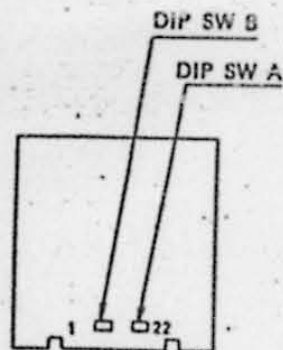


BARE BD No.
171-5054-02
171-5054-03

44PIN P-2 96mm

COMPONENT SIDE		SOLDER SIDE
GND	PH	GND
BLUE	PH	CMP SYNC
RED	PH	GREEN
SPEAKER	PH	SPEAKER
SERVICE SW.	PH	NOT USED
TEST SW.	PH	NOT USED
COIN SW 2	PH	2P START
COIN SW 1	PH	1P LEFT
1P LEFT	PH	2P LEFT
1P RIGHT	PH	2P RIGHT
1P UP	PH	2P UP
1P DOWN	PH	2P DOWN
NOT USED	PH	NOT USED
1P JUMP	PH	2PJUMP
1P ATTACK	PH	2P ATTACK
NOT USED	PH	NOT USED
+12V	PH	NOT USED
COIN METER 1	PH	COIN METER 2
+6V	PH	+6V
GND	PH	GND

JOYSTICK CONTROL DIRECTIONS



SUPPLY VOLTAGES & CURRENT

VOLTAGE	CURRENT
DC5V	4.1A
DC12V	0.25 A