

# RING KING

©1985 WOODPLACE INC.

Monitor V  
4-Weg

## ■ DIP SWITCH: INSTRUCTION DIP SW. 1


CONTENTS		SWITCH-POSITION							
		1	2	3	4	5	6	7	8
REPLAY	NONE							OFF	OFF
	70,000							ON	OFF
	100,000							OFF	ON
	150,000							ON	ON
DEMO SOUND	WITH							OFF	
	WITHOUT							ON	
DIFFICULT	1				OFF	OFF			
	2				OFF	ON			
	3				ON	OFF			
	4				ON	ON			
CABINET	TABLE			OFF					
	UPRIGHT			ON					
TEST MODE	NORMAL	OFF							
	TEST	ON							

## DIP SW. 2


CONTENTS		SWITCH-POSITION								
		1	2	3	4	5	6	7	8	
RATE	1COIN 1PLAY							OFF	OFF	OFF
	1 " 2 "							OFF	OFF	ON
	1 " 3 "							OFF	ON	OFF
	1 " 4 "							OFF	ON	ON
	1 " 5 "							ON	OFF	OFF
	2 " 1 "							ON	OFF	ON
	3 " 1 "							ON	ON	OFF
	4 " 1 "							ON	ON	ON
STILL	PICTURING	OFF								
	STOP MODE	ON								

## ■ WIRING DIAGRAM : CONNECTOR


36Pin P=4mm



### SOLDER SIDE

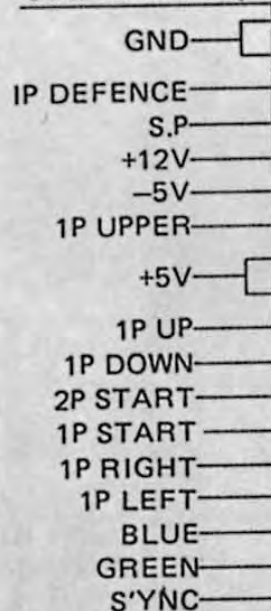

### PARTS SIDE

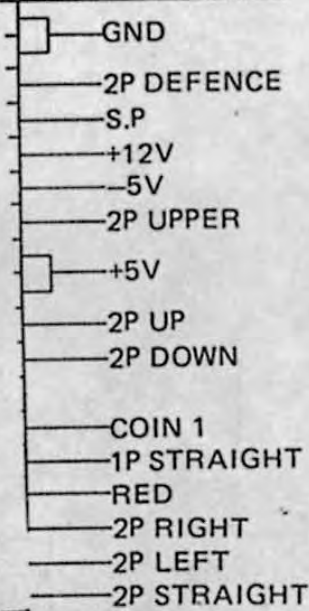

## ■ CONTROL PANEL : INSTRUCTION

