

THE ALPHAX Z

PARTS SIDE

SOLDER SIDE

1p RIGHT	1	2P RIGHT
1P LEFT	2	2P LEFT
1P UP	3	2P UP
1P DOWN	4	2P DOWN
1P SHOOT 1	5	2P SHOOT 1
1P SHOOT 2	6	2P SHOOT 2
	7	
	8	
COIN 1	9	1P START
COIN 2	10	2P START
COIN SERVICE	11	
	12	
-5V	13	-5V
SP 1	14	COIN CONTER 1
SP 2	15	COIN CONTER 2
COUNTER	16	GND
SYNC	17	RED
GREEN	18	BLUE
12V	19	12V
5V	20	5V
GND	21	GND
GND	22	GND


COIN SYSTEM

COIN SYSTEM FOR 2 WAY CONNECTOR NO.

COIN SYSTEM,	COIN SW	COIN METER	REMARKS
A 1 WAY	G CONNCTOR - 8	G CONNCTOR - 9	NORMAL USE PART SIDE
B	G CONNCTOR - J	G CONNCTOR - K	SOLID SIDE

IF NOT USE MAIN P C BOARD COIN METER SEE BELOW NOT USE.

- ' IN CASE COIN SYSTEM A ----- ABOVE J P 7 ON THE CPU
P C BOARD WILL BE JUMP.
- ' IN CASE COIN SYSTEM B ----- ABOVE J P 6 ON THE CPU
P C BOARD WILL BE JUMP.

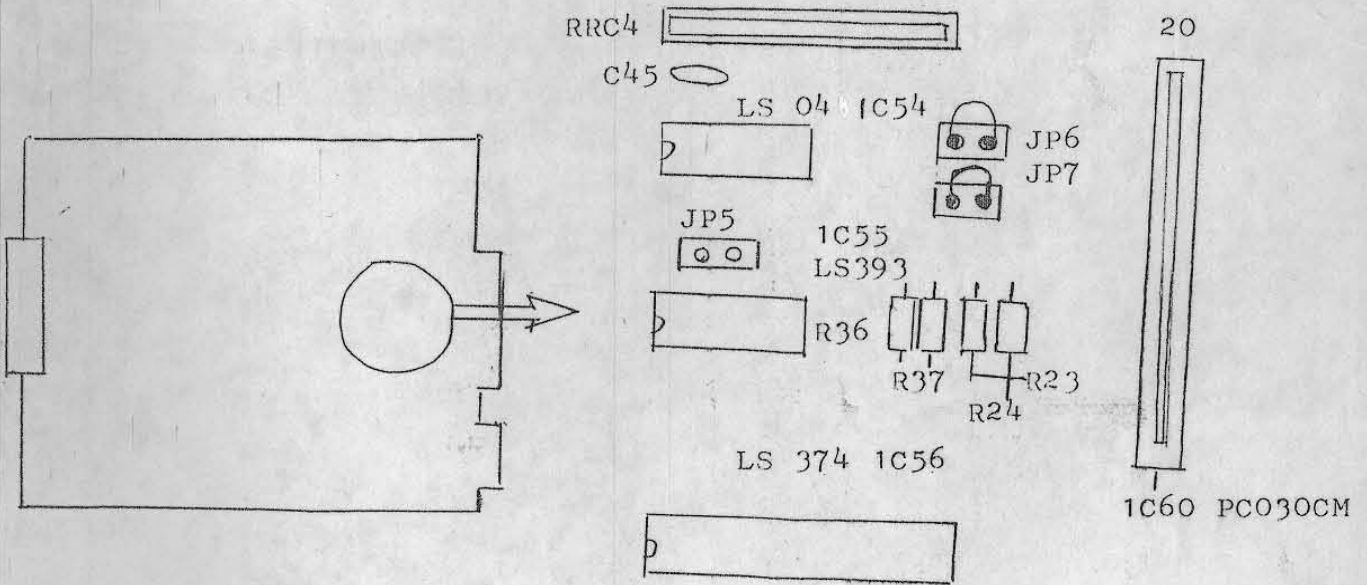

THE ALPHAX

アルファックス・セット

■ディップスイッチの設定

●DIP SW. A

		1	2	3	4	5	6	7	8
COIN-A	1COIN 1PLAY	OFF	OFF	OFF					
	2COIN 1PLAY	ON	ON						
	3COIN 1PLAY	OFF		ON					
	4COIN 1PLAY	ON							
	5COIN 1PLAY	OFF	OFF						
	1COIN 2PLAY	ON							
	1COIN 3PLAY	OFF	ON						
	2COIN 3PLAY	ON							
COIN-B	1COIN 1PLAY				OFF	OFF			
	2COIN 1PLAY				ON				
	3COIN 1PLAY				OFF	ON			
	4COIN 1PLAY				ON				
	5COIN 1PLAY				OFF	OFF			
	1COIN 2PLAY				ON				
	1COIN 3PLAY				OFF	ON			
	2COIN 3PLAY				ON				
PAUSE-SW	通常 ポーズ							OFF ON	
TEST-MODE	ゲームモード テストモード								OFF ON

●DIP SW B

		1	2	3	4	5	6	7	8
プレイヤー数	3	OFF	OFF						
	4	ON							
	5	OFF	ON						
	6	ON							
プレイヤー 加算点数	10万、30万、50万			OFF	OFF				
	20万、50万、80万			ON					
	30万、70万、110万			OFF	ON				
	50万、100万、150万			ON					
難易度	A EASY					OFF	OFF		
	B					ON			
	C					OFF	ON		
	D HARD					ON			
ゲームスタイル	テーブル							OFF	ON
	アップライト							ON	OFF
画面反転	正常								OFF
	反転								ON

■コネクター結線図

PARTS FACE			SOLDERING FACE
1P RIGHT	1A	1B	2P RIGHT
1P LEFT	2A	2B	2P LEFT
1P JUNP	3A	3B	2P JUNP
1P DOWN	4A	4B	2P DOWN
1P SHOOT 1	5A	5B	2P SHOOT1
1P SHOOT 2	6A	6B	2P SHOOT2
	7A	7B	
	8A	8B	
COIN- 1	9A	9B	1P START
COIN- 2	10A	10B	2P START
COIN- SERVICE	11A	11B	
	12A	12B	
- 5V	13A	13B	- 5V
SP 1	14A	14B	COIN CONTER- 1
SP 2	15A	15B	COIN CONTER- 2
カウンター	16A	16B	GND
SYNC	17A	17B	RED
GREEN	18A	18B	BLUE
12V	19A	19B	12V
5V	20A	20B	5V
GND	21A	21B	GND
GND	22A	22B	GND

