# ARKANOID

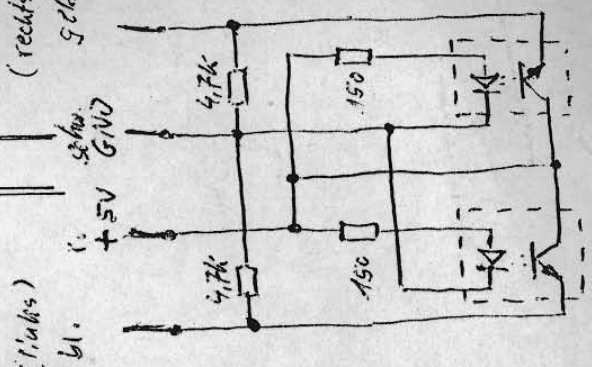


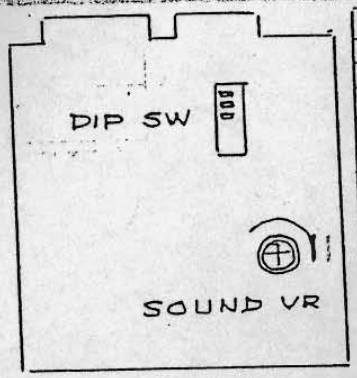


| H | |
|---|---|
| 1 | GND |
| 2 | GND |
| 3 | GND |
| 4 | +5V |
| 5 | +5V |
| 6 | +5V |
| 7 | |
| 8 | +12V |
| 9 | |
| 10 | |
| 11 | |
| 12 | |

| CONNECTOR | | SOLDER SIDE | |
|---|---|---|---|
| GND | 1 | A | GND |
| VIDEO R | 2 | B | VIDEO GND |
| VIDEO G | 3 | C | VIDEO B |
| VIDEO SYNC | 4 | D | |
| SOUND OUT (+) | 5 | E | SOUND OUT (-) |
| POST | 6 | F | POST |
| | 7 | | |
| COIN SW (A) | 8 | J | COIN SW (B) |
| COIN METER (A) | 9 | K | COIN METER (B) |
| COIN LOCKOUT (A) | 10 | L | COIN LOCKOUT (B) |
| SERVICE SW | 11 | M | TILT SW |
| SELECT -1 | 12 | N | SELECT - 2 |
| | 13 | P | |
| | 14 | R | |
| 1P RIGHT | 15 | S | 2P RIGHT |
| 1P LEFT | 16 | T | 2P LEFT |
| | 17 | U | |
| | 18 | V | |
| | 19 | W | |
| | 20 | X | |
| 1P SERVE/FIRE | 21 | Y | 2P SERVE/FIRE |
| | 22 | Z | |

NOTICE: WHEN YOU CHANGE DIP SW,
PLS SWITCH OFF POWER SOURCES.

DIP SW.

| ITEM | CONTENTS | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|---|---|---|---|---|---|---|---|---|---|
| GAME STYLE | TABLE | OFF | | | | | | | |
| | UP RIGHT | ON | | | | | | | |
| COIN | * 1 COIN 1 PLAY | | OFF | | | | | | |
| | 1 COIN 2 PLAY | | ON | | | | | | |
| NUMBER OF PLAYER | * 3 | | | OFF | | | | | |
| | 5 | | | ON | | | | | |
| BONUS LIFE | * 20K POINT/60K EA | | | | OFF | | | | |
| | 20K POINT | | | | ON | | | | |
| DIFFICULTY | * EASY A | | | | | OFF | | | |
| | NORMAL B | | | | | ON | | | |
| TEST MODE | * GAME | | | | | | OFF | | |
| | TEST MODE | | | | | | ON | | |
| MONITOR | * NORMAL | | | | | | | OFF | |
| | REVERSE | | | | | | | ON | |
| CONTINUE PLAY | * NO | | | | | | | | OFF |
| | YES | | | | | | | | ON |