




## JAMMA

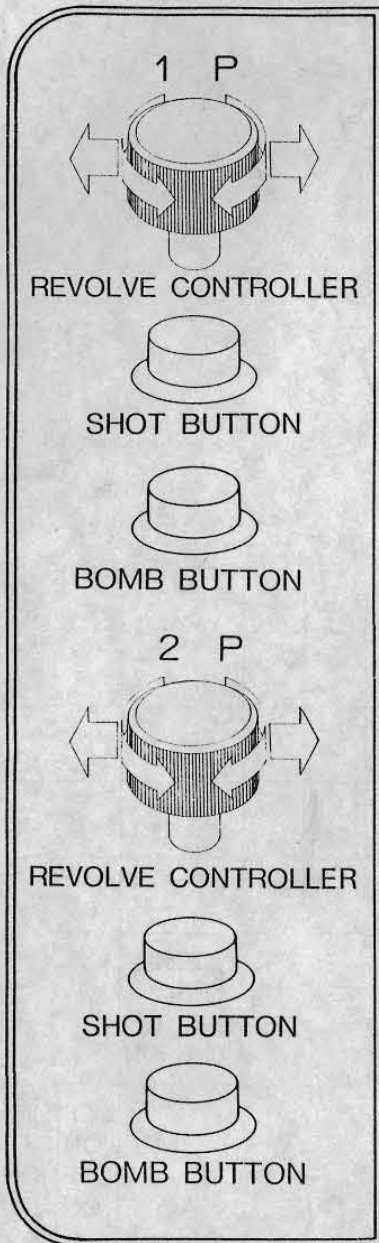


SOLDER FACE			PARTS FACE	
GND	A	1	GND	
GND	B	2	GND	
+5V	C	3	+5V	
+5V	D	4	+5V	
N.C.	E	5	N.C.	
+12V	F	6	+12V	
		H		
COIN COUNTER 2	J	8	COIN COUNTER 1	
(COIN LOCK OUT 2)	K	9	(COIN LOCK OUT 1)	
SP (-)	L	10	SP (+)	
N.C.	M	11	N.C.	
VIDEO GREEN	N	12	VIDEO RED	
VIDEO SYNC	P	13	VIDEO BLUE	
SERVICE SW	R	14	VIDEO GND	
	S	15	TEST SW	
COIN SW 2	T	16	COIN SW 1	
START SW 2	U	17	START SW 1	
2P UP	V	18	1P UP	
2P DOWN	W	19	1P DOWN	
N.C.	X	20	N.C.	
N.C.	Y	21	N.C.	
2P PUSH 1	Z	22	1P PUSH 1	
2P PUSH 2	a	23	1P PUSH 2	
N.C.	b	24	N.C.	
N.C.	c	25	N.C.	
N.C.	d	26	N.C.	
GND	e	27	GND	
GND	f	28	GND	

## SUB CONNECTER CN1



1P CONTROLLER-A  
+5V  
GND  
1P CONTROLLER-B  
2P CONTROLLER-A  
+5V  
GND  
2P CONTROLLER-B

CN1

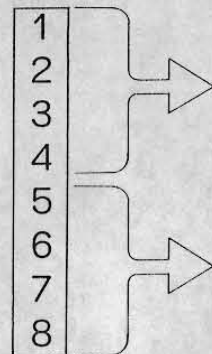

1P  
CONTROLLER

2P  
CONTROLLER

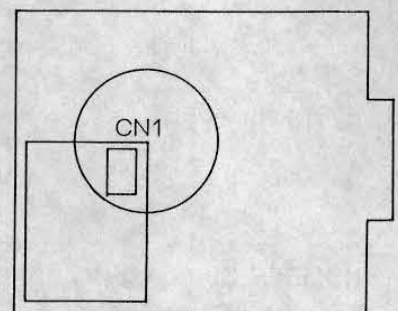

**TOAPLAN Co.,Ltd.**

TOA BLDG.  
1-8-4 SHIMIZU, SUGINAMI-KU TEL:03-5397-0511  
TOKYO,167.JAPAN FAX:03-5397-4755