

# INSTRUCTION WOLF

SKILL GUN (NEW)		COMPONENT SIDE (UPPER)	
A	+12	A	1
B	+12	B	2
C	-5	C	3
SOUND (+)	D	SOUND (+)	
E	5		
F	6	VIDEO GREEN	
G	7		
H	8	VIDEO BLUE	
I	9	VIDEO RED	
J	10	VR 3 VOLUME SELECTOR	
K	11	VR 2 - DITTO -	
L	12	VR 1 - DITTO -	
M	13	GAME START	
N	14	HOME	
O	15	TIFF	
P	16	GUN ENGINE	
Q	17		
R	18		
S	19		
T	20		
U	21	COIN 2	
V	22	COIN 1	
W	23	VIDEO SYNC	
X	24	SENSOR	
Y	25	+5	
Z	26	+5	
GND	e	27	GND

Operation Wolf

WIRE NO.	COLOUR	FUNCTION	NO. OF CONNCT
1	PURPLE	MOTOR	1
2	GREEN	GUN (GND)	2
3	BLACK	GND	27
4	NC	NC	27
5	YELLOW	+12V	2
6	BLUE SEALED (BLACK)	GND	28
7	BROWN	START SW	13
8	GREY	MOTOR	16
9	WHITE	SICKER 1. (TRIGGER)	14 (LEFT)
10	PINK	SICKER 2. (DUMB)	14 (RIGHT)
11	BLUE SEALED (WHITE)	SENSOR	24
12	ORANGE	-12	

\* PLEASE KEEP IN MIND THAT IT IS INCLINED TO CAUSE  
BREAK-DOWN FOR GUN KIT IF SOME ONE CONNECT WRONG  
COLOR WIRE INSTEAD OF ABOVE INSTRUCTION.

#### SETTING OF DIP SWITCH A

SETTING	POSITION	1	2	3	4	5	6	7	8
GAME STYLE	CONVERSION TYPE	OFF							
	UPRIGHT TYPE	ON							
CONTINUE PLAY	YES	-	ON						
	NO		OFF						
ATTRACT SOUNDS	EVERY 3 ROUNDS				OFF				
	NO				ON				
COIN A	1 COIN 1 PLAY					OFF			
	1 COIN 2 CREDIT					ON			
	2 COINS 1 CREDIT					OFF			
	2 COINS 3 PLAYS					ON			
COIN B	1 COIN 1 PLAY						OFF		
	1 COIN 2 PLAYS						ON		
	2 COINS 1 PLAY						OFF		
	2 COINS 3 PLAYS						ON		

**SETTING OF DIP SWITCH B**


08-09-29 10:14

2 39 49 623680  
ELMAC III serial

ATTN. MR. ASSISTANT

DISPOSITIVI COMP. PIASTRINO


Operazione  
Wolf

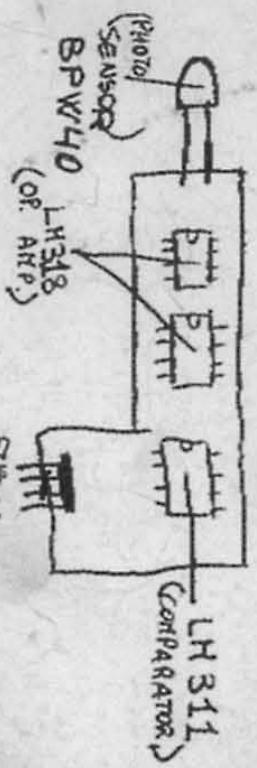

POS INTEGRATO SENSOR

IC TYPE 74LS74

MOTHER BOARD

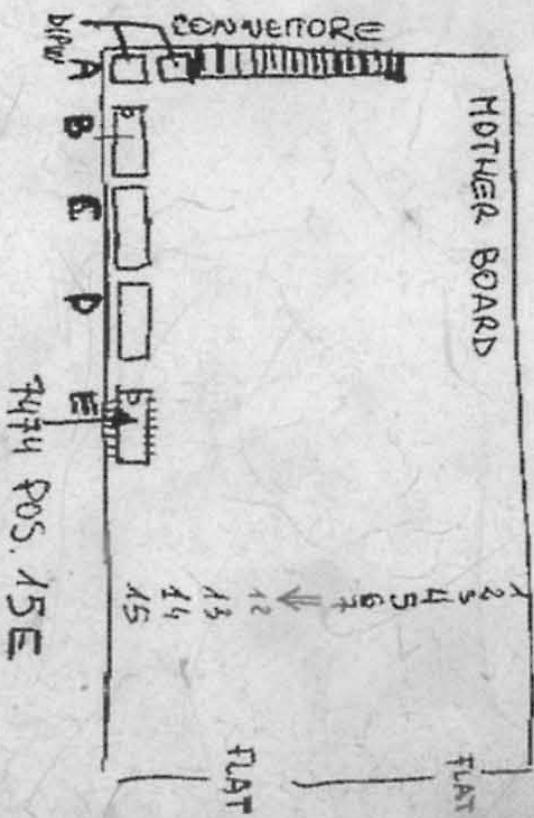

7474 POS. 15E

ELMAC

# OPERATION WOLF

R

Solder Side

(Schwarz) GND

GND

(blau) Video Blau

## Parts Side

GND

Video Rot (rot)

Video Grün (grün)

## Video Sync.(weiß)

(Orange-violet) Coin in 2

## gclib - rat Coin Counter

(ein in 1 (orange-grün))

Coin counter (orange-schwarz)


Service (weiß-grau)

Start (rot-schwarz)

(Weiß - braun) (grün - schwarz) (gelb - braun) langfristige Regelung

# OPERATION WOLF


M

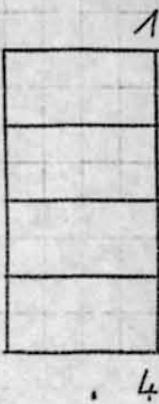

Exzenter Rüttler (grün)  
Spannung (schwarz)


Bombe (Violet - weiß)

X

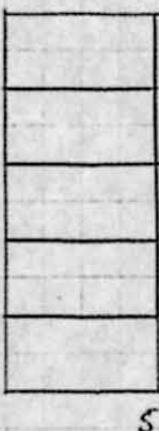

Speaker 1 (grün-grau)  
Speaker 1 (violet)  
Speaker 2 (braun-grün)  
N.C.  
Speaker 2 (braun-rosa)

N

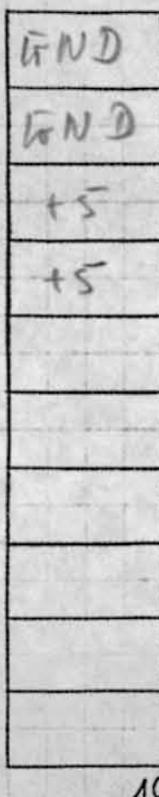


12 V (braun-schwarz)

-5 V (grau)

12 V (braun-schwarz)

# OPERATION WOLF

H

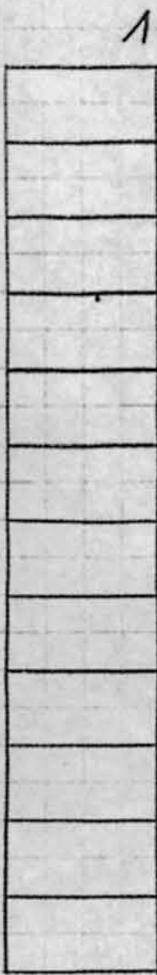

GND (schwarz)

+5V (rot)

-5V (grau)

+12V (braun-schwarz)

+12V (braun-schwarz)