


RENEGADE

CONNECTING DIAGRAM

半田面 Solder Side		部品面 Parts Side
GND	A 1	GND
GND	B 2	GND
+5V	C 3	+5V
+5V	D 4	+5V
-5V	E 5	-5V
+12V	F 6	+12V
	H 7	
	J 8	
	K 9	
Speaker (-)	L 10	Speaker (+)
	M 11	
Video Green	N 12	Video Red
Video Sync	P 13	Video Blue
Service	R 14	Video GND
	S 15	
Coin 2	T 16	Coin 1
2P Start	U 17	1P Start
2P Up	V 18	1P Up
2P Down	W 19	1P Down
2P Left	X 20	1P Left
2P Right	Y 21	1P Right
2P Push S/W 1 (L/Attack)	Z 22	1P Push S/W 1 (L/Attack)
2P Push S/W 2 (Jump)	a 23	1P Push S/W 2 (Jump)
2P Push S/W 3 (R/Attack)	b 24	1P Push S/W 3 (R/Attack)
	c 25	
	d 26	
GND	e 27	GND
GND	f 28	GND

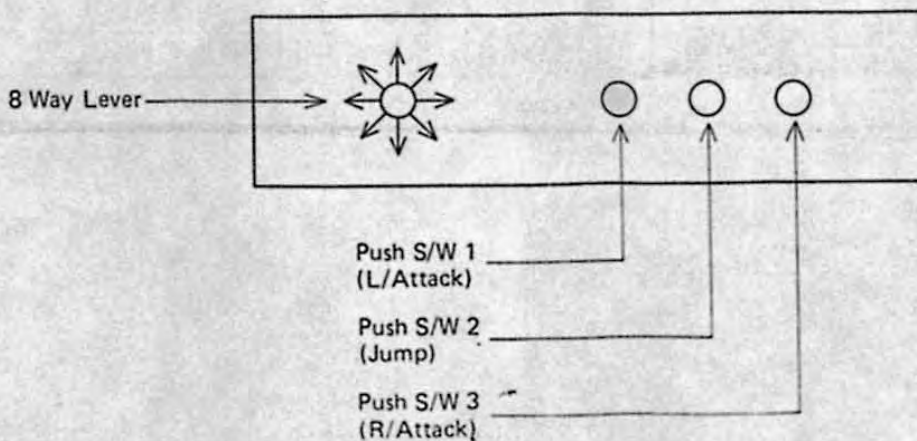

DIP SWITCH SETTINGS

DIP SWITCH 1

1	2	3	4	5	6	7	8	
								● Coin-1
OFF	OFF							1 Coin - 1 Play
ON	OFF							1 Coin - 2 Play
OFF	ON							1 Coin - 3 Play
ON	ON							2 Coin - 1 Play
								● Coin-2
		OFF	OFF					1 Coin - 1 Play
		ON	OFF					1 Coin - 2 Play
		OFF	ON					1 Coin - 3 Play
		ON	ON					2 Coin - 1 Play
								● Number of Character
				OFF				1
				ON				2
								● Bonus Score
					OFF			30,000 PTS
					ON			No Bonus
								● TV-Screen
						OFF		Table Type Use
						ON		Up-Right Type Use
								● Screen Invert
							OFF	Normal
							ON	Invert

DIP SWITCH 2

1	2	3	4	5	6	7	8	
								● 難 度 Degree of Difficulty
OFF	OFF	DON'T USE	DON'T USE	DON'T USE	DON'T USE	DON'T USE	DON'T USE	普通 Normal
ON	OFF							やさしい Easy
OFF	ON							ややむずかしい <small>Less Than</small> Difficult
ON	ON							むずかしい Difficult

WIRING DIAGRAM

SOLDER SIDE		PART SIDE
GND	1	G N D
GND	2	G N D
+5V	3	+5V
+5V	4	+5V
-5V	5	-5V
+12V	6	+12V
	7	
	8	
	9	
SPEAKER (-)	10	SPEAKER (+)
	11	
VIDEO GREEN	12	VIDEO RED
VIDEO SYNC	13	VIDEO BLUE
SERVICE	14	VIDEO GND
	15	
COIN 2	16	COIN 1
2P START	17	1P START
2P UP	18	1P UP
2P DOWN	19	1P DOWN
2P LEFT	20	1P LEFT
2P RIGHT	21	1P RIGHT
SW1 (L/ATTACK)	22	SW1 (L/ATTACK)
SW2 (JUMP)	23	SW2 (JUMP)
SW3 (R/ATTACK)	24	SW3 (R/ATTACK)
	25	
	26	
GND	27	GND
GND	28	GND

검	담	수	과
제			<i>[Signature]</i>

DIP SW A		1	2	3	4	5	6	7	8
=====									
COIN 1	1COIN/1PLAY	OFF	OFF						
	1COIN/2PLAY	ON	OFF						
	1COIN/3PLAY	OFF	ON						
	2COIN/1PLAY	ON	ON						
COIN 2	1COIN/1PLAY			OFF	OFF				
	1COIN/2PLAY			ON	OFF				
	1COIN/3PLAY			OFF	ON				
	2COIN/1PLAY			ON	ON				
NUMBER OF CHARACTER	1				OFF				
	2				ON				
BONUS	30,000PTS					OFF			
	NO BONUS					ON			
SCREEN TYPE	TABLE						OFF		
	UP RIGHT						ON		
SCREEN INVERT	NORMAL							OFF	OFF
	INVERT							ON	ON

DIP SW B		1	2	3	4	5	6	7	8
=====									
DIFFICULTY	NORMAL	OFF	OFF						
	EASY	ON	ON						
	DIFFCULT	OFF	ON						
	VERY DIFFICULT	ON	ON						