

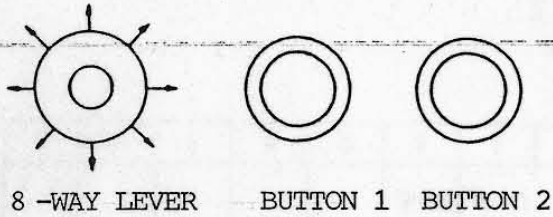


① INSTRUCTION



● BUTTON 1 SHOOT
 ● BUTTON 2 ROPE

● DIP sw POSITION

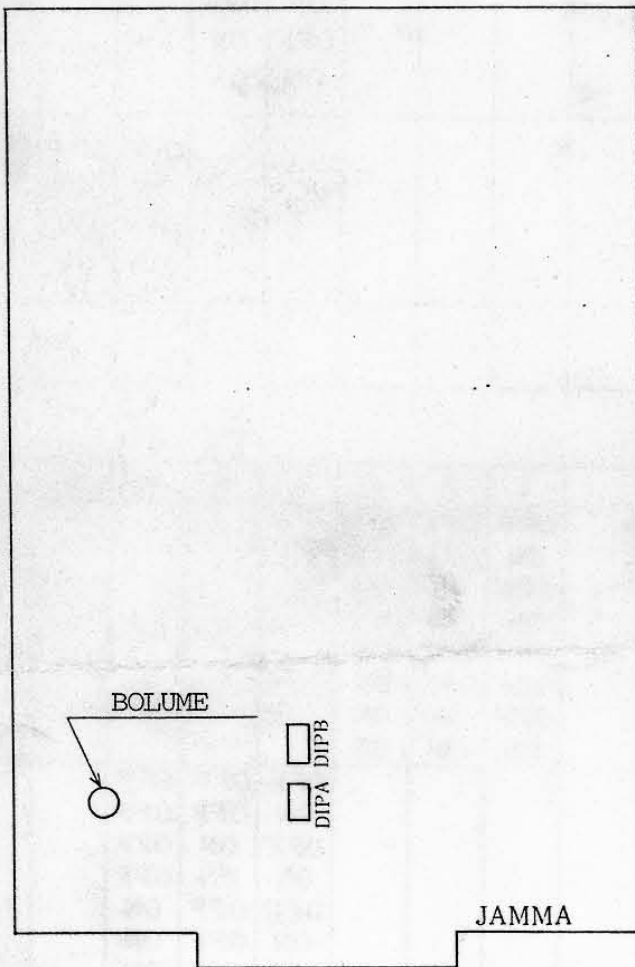

DIP sw

JAMMA

SOLDER SIDE			COMPONET SIDE
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
N.C	E	5	N.C
+12V	F	6	+12V
	H	7	
COIN COUNTER 2	J	8	COIN COUNTER 1
COIN LOCK OUT 2	K	9	COIN LOCK OUT 1
SP(-)	L	10	SP(+)
N.C	M	11	N.C
VIDEO GREEN	N	12	VIDEO RED
VIDEO SYNC	P	13	VIDEO BLUE
N.C	R	14	VIDEO GND
N.C	S	15	N.C
COIN SW 2	T	16	COIN SW 1
START SW 2	U	17	START SW 1
2 P UP	V	18	1 P UP
2 P DOWN	W	19	1 P DOWN
2 P LEFT	X	20	1 P LEFT
2 P RIGHT	Y	21	1 P RIGHT
2 P PUSH 1	Z	22	1 P PUSH 1
2 P PUSH 2	a	23	1 P PUSH 2
2 P PUSH 3	b	24	1 P PUSH 3
N.C	c	25	N.C
N.C	d	26	N.C
GND	e	27	GND
GND	f	28	GND

● CONNECTOR

CR7E-56DA-3.96E: (HIROSE)
 or
 1168-056-009: (KEL)