UFO 戦士ようこちゃん (834-6659)

COIN/CREDIT OPTION SWITCH SETTING　　DIP SWITCH #A

OPTION		1	2	3	4	5	6	7	8
1 COIN	1 CREDIT	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF
1 COIN	2 CREDITS	ON	OFF	OFF	OFF	ON	OFF	OFF	OFF
1 COIN	3 CREDITS	OFF	ON	OFF	OFF	OFF	ON	OFF	OFF
1 COIN	4 CREDITS	ON	ON	OFF	OFF	ON	ON	OFF	OFF
1 COIN	5 CREDITS	OFF	OFF	ON	OFF	OFF	OFF	ON	OFF
1 COIN	6 CREDITS	ON	OFF	ON	OFF	ON	OFF	ON	OFF
2 COINS	1 CREDIT	OFF	ON	ON	OFF	OFF	ON	ON	OFF
3 COINS	1 CREDIT	ON	ON	ON	OFF	ON	ON	ON	OFF
4 COINS	1 CREDIT	OFF	OFF	OFF	ON	OFF	OFF	OFF	ON
2 COINS	3 CREDITS	ON	OFF	OFF	ON	ON	OFF	OFF	ON
2 COINS	1 CREDIT								
4 COINS	2 CREDITS	OFF	ON	OFF	ON	OFF	ON	OFF	ON
5 COINS	3 CREDITS								
6 COINS	4 CREDITS								
2 COINS	1 CREDIT	ON	ON	OFF	ON	ON	ON	OFF	ON
4 COINS	3 CREDITS								
1 COIN	1 CREDIT								
2 COINS	2 CREDITS								
3 COINS	3 CREDITS	OFF	OFF	ON	ON	OFF	OFF	ON	ON
4 COINS	4 CREDITS								
5 COINS	6 CREDITS								
1 COIN	1 CREDIT								
2 COINS	2 CREDITS	ON	OFF	ON	ON	ON	OFF	ON	ON
3 COINS	3 CREDITS								
4 COINS	5 CREDITS								
1 COIN	1 CREDIT	OFF	ON	ON	ON	OFF	ON	ON	ON
2 COINS	3 CREDITS								
FREE PLAY		ON	ON	ON	ON	ON	ON	ON	ON
		COIN SW #1				COIN SW #2			

OPTION SWITCH SETTING　　DIP SWITCH #B

OPTION		1	2	3	4	5	6	7	8
GAME DIFFICULTY	EASY	ON	ON						
	NORMAL	ON	OFF						
	HARD	OFF	ON						
NUMBER OF PLAYERS	3			OFF	OFF				
	4			ON	OFF				
	5			ON	ON				
TYPE	TABLE					OFF			
	UP RIGHT					ON			
NOT CONTINUE							OFF		
CONTINUE							ON		
ADVERTISE SOUND	OFF							OFF	
	ON							ON	
※ PLAYER MODE	NORMAL								OFF
	EASY								ON
TEST MODE ON		ON	ON	ON	ON	ON	ON	ON	ON

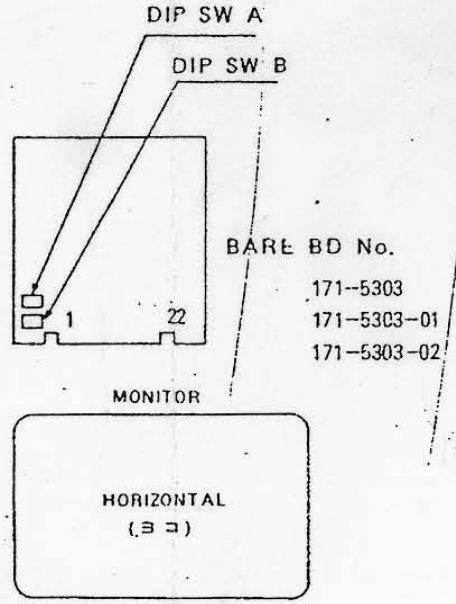

※ PLAYER MODEの説明

EASY　：画面上の敵に
当った場合でも
POWERは減りません。

NORMAL：画面上の敵に
当った場合
POWERは2つ減ります。

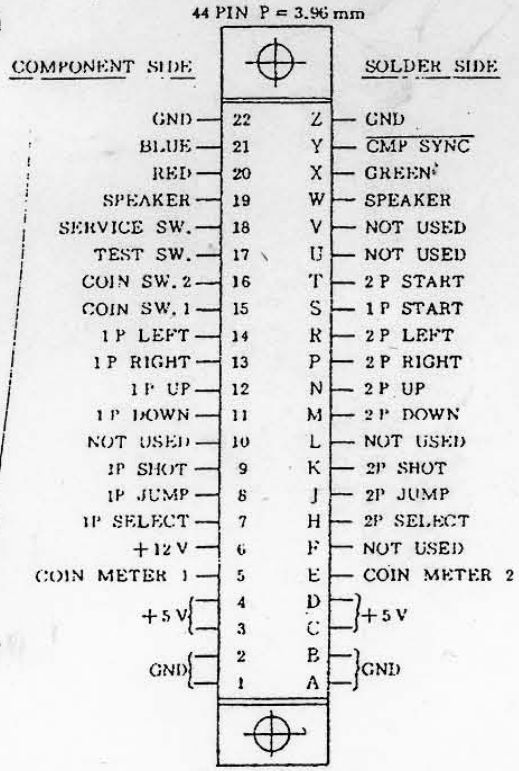

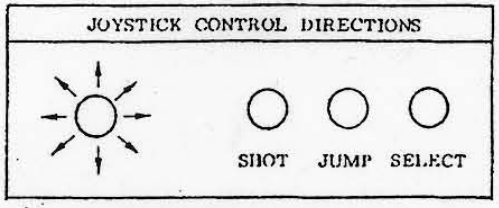

SUPPLY VOLTAGES & CURRENT	
VOLTAGE	CURRENT
DC 5 V	4.5 A
DC 12 V	0.25 A

421-7289