

ADJUSTMENT ON GAME PC BOARD (W.G.P. G25 00578A)

L-CONNECTOR

1	TRANSCIEIVER+
2	TRANSCIEIVER-
3	GND
4	RECEIVER +
5	RECEIVER -
6	GND

W-CONNECTOR

1	VIDEO GND
2	VIDEO SYNC
3	VIDEO B
4	VIDEO G
5	VIDEO R

G-CONNECTOR


SOLDER SIDE		COMPONENTS SIDE	
GND	A	1	GND
GND	B	2	GND
+5V	C	3	+5V
+5V	D	4	+5V
-5V	E	5	-5V
+12V	F	6	+12V
POST	H	7	POST
FRONT SP (-)	J	8	FRONT SP (+)
REAR SP (-)	K	9	REAR SP (+)
COIN SW (B)	L	10	COIN SW (A)
LOCK OUT (B)	M	11	LOCK OUT (A)
METER (B)	N	12	METER (A)
	P	13	SERVICE SW
START LAMP	R	14	START SW
SHIFT DOWN	S	15	SHIFT UP
BRAKE LAMP	T	16	
+24V	U	17	ACCEL ADJ
MOTOR	V	18	HANDLE ADJ
	W	19	HANDLE VR
BRAKE VR	X	20	ACCEL VR
GND	Y	21	GND
GND	Z	22	GND

H-CONNECTOR

1	GND	7	+5V
2	GND	8	+5V
3	GND	9	+5V
4	GND	10	POST
5	GND	11	+5V
6		12	+5V

S-CONNECTOR

1	+5V
2	+5V
3	GND
4	GND
5	GND

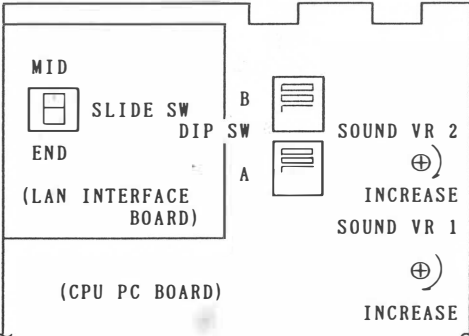

☆ CONTROL OF THIS GAME USES STEERING-WHEEL, ACCELERATOR, BRAKE-PEDAL AND CHANGE-PEDAL.

\* REGARDING THE SLIDE SWITCH LOCATED ON THE LAN INTERFACE BOARD: IN CASE OF COMMUNICATION PLAY, PLACE THE ID NO.1 MACHINE AND THE MAXIMUM ID NO. MACHINE ON THE "END" SIDE AND THE OTHER MACHINES ON THE "MID" SIDE.

NOTE) BEFORE CHANGING THE SETTING OF DIP SWITCH, TURN THE POWER SWITCH OFF.

◇ SETTING OF DIP SWITCH A

(\*) : FACTORY SETTING

SETTINGS	POSITIONS	1	2	3	4	5	6	7	8						
TEST MODE	* NORMAL GAME	OFF		OFF											
	TEST MODE			ON											
ATTRACT SOUND	* WITH										OFF				
	WITHOUT										ON				
PLAY PRICING COIN A	* 1 COIN 1 PLAY											OFF	OFF		
	2 COINS 1 PLAY											ON			
	3 COINS 1 PLAY											OFF	ON		
	4 COINS 1 PLAY											ON			
PLAY PRICING COIN B	* 1 COIN 2 PLAYS							OFF	OFF						
	1 COIN 3 PLAYS							ON							
	1 COIN 4 PLAYS							OFF	ON						
	1 COIN 6 PLAYS							ON							

◇ SETTING OF DIP SWITCH B

SETTINGS	POSITIONS	1	2	3	4	5	6	7	8
GAME DIFFICULTY	* B (NORMAL)	OFF	OFF						
	A (EASY)	ON							
	C (HARD)	OFF	ON						
	D (VERY HARD)	ON							
SHIFT PATTERN SELECT	* WITH								
	WITHOUT								
LINK PLAY	* SINGLE PLAY								
	LINK PLAY								
YOUR ID NUMBER	* NO. 1				OFF			OFF	OFF
	NO. 2							ON	
	NO. 3							OFF	ON
	NO. 4							ON	
	NO. 5							OFF	OFF
	NO. 6							ON	
	NO. 7							OFF	ON
	NO. 8							ON	